

Mission design for LISA Pathfinder

M Landgraf[†], M Hechler[†], and S Kemble[‡]

[†] ESA/ESOC, Robert-Bosch-Straße 5, D-64293 Darmstadt, Germany

E-mail: Markus.Landgraf@esa.int

[‡] EADS Astrium, Stevenage, United Kingdom

Submitted to: *Class. Quantum Grav.*

PACS numbers: 95.55.Pe, 07.87.+v, 95.55.Ym, 04.80.Nm

Abstract. Here we describe the mission design for SMART-2/LISA Pathfinder. The best trade-off between the requirements of a low-disturbance environment and communications distance is found to be a free-insertion Lissajous orbit around the first co-linear Lagrange point of the Sun-Earth system (L_1), 1.5×10^6 km from Earth. In order to transfer SMART-2/LISA Pathfinder from a low Earth orbit, where it will be placed by a small launcher, the spacecraft carries out a number of apogee-raise manoeuvres, which ultimately place it to a parabolic escape trajectory towards L_1 . The challenges of the design of a small mission are met, fulfilling the very demanding technology demonstration requirements without creating excessive requirements on the launch system or the ground segment.

1. Introduction

ESA has decided to flight-test the technology that its Laser Interferometer Space Antenna (LISA) will use to detect gravitational waves (Irion 2002, Danzmann 2003, Hechler and Folkner 2003). The main goal in this test is to find out whether non-gravitational disturbances can be removed below the sensitivity limit by careful design and a drag-free and attitude control system (DFACS). The DFACS uses an inertial sensor to detect non-gravitational accelerations acting on the spacecraft hull, and then compensates them using micro-propulsion. The second mission in the frame of the ESA programme for Small Missions for Advanced Research in Technology (SMART-2) was initiated to perform the required space-borne tests. Here we describe the mission design for SMART-2/LISA Pathfinder. As the interplanetary target orbit for LISA requires substantial on-board communication equipment, which is not suitable for a small mission, alternative options for the operational orbit of SMART-2/LISA Pathfinder are considered. The driving requirement for the selection of the operational orbit is to find an environment, which does not exceed the capabilities of the DFACS.

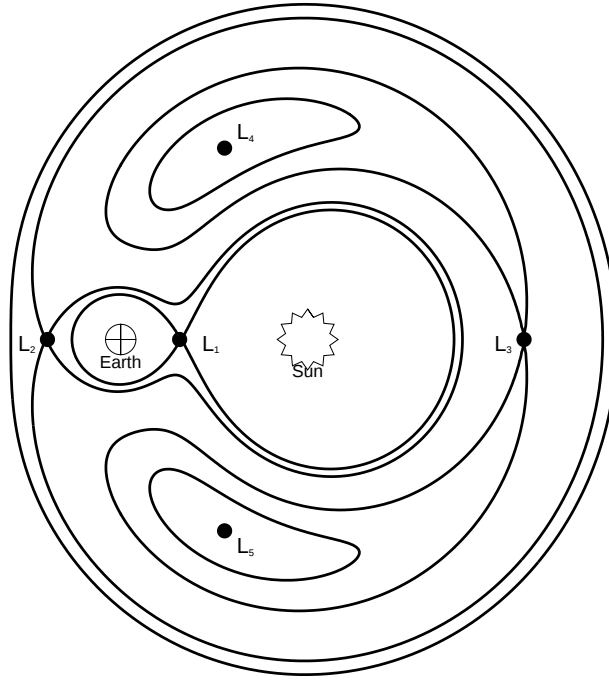


Figure 1. Curves of zero velocity (ZVC) in the RC3P of Sun, Earth, and spacecraft (not to scale). The near-Earth Lagrange points L_1 and L_2 are located at the intersection of the ZVCs on the line connecting Sun and Earth.

This poses mainly requirements on the power spectrum of spurious accelerations in the frequency band around 1 mHz, strength of gravity gradients, thermal variations, and electro-static charging currents. In combination these requirements essentially rule out geo-centric orbits.

2. Selection of Operational Orbit

The requirements for the operational orbit are:

- (i) differential gravity $< 2.5 \times 10^{-10} \text{ m s}^{-2}$
- (ii) high thermal stability
- (iii) maximum Δv capacity: $3,170 \text{ m s}^{-1}$
- (iv) full-year launch window
- (v) daily visibility from the ESA ground-station in Villafranca ≥ 8 hours

In order to achieve the required flatness of the gravity field simultaneously with the thermal stability, an orbit far away from the Earth must be found without violating the maximum Δv capability. Libration orbits around the near-Earth Lagrange points of the restricted circular three-body problem (RC3P) are located $\approx 1.5 \times 10^6 \text{ km}$ from Earth and can be reached without an insertion manoeuvre (Farquhar 1973, Gómez et al 2001).

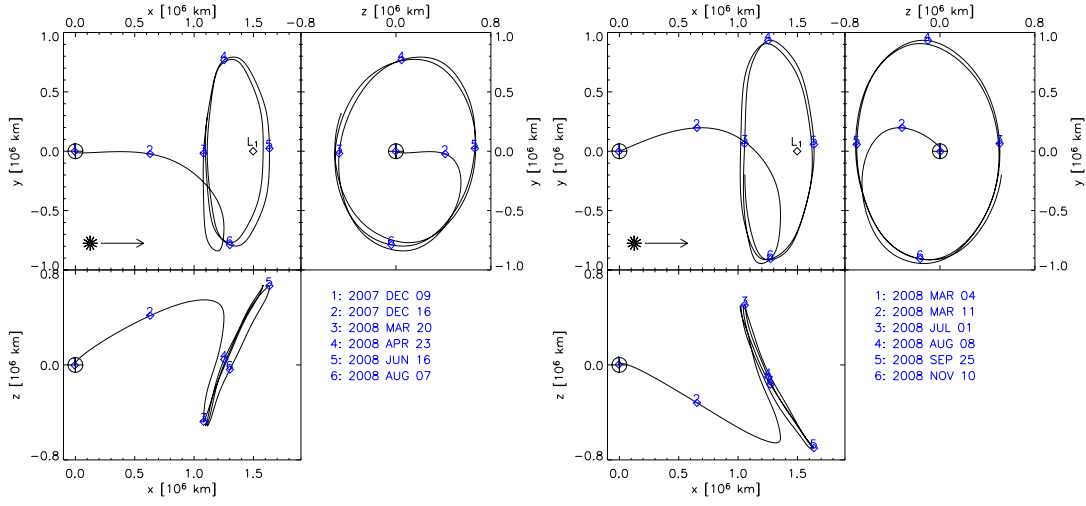


Figure 2. Three-dimensional representation of the type-1 (left) and type-2 (right) trajectories after the escape manoeuvre. The Earth-centred synodic (rotating) x - y - z system is chosen such that the x - y plane is the ecliptic plane and the x -axis points towards the Sun.

For LISA Pathfinder the Sun-ward Lagrange point L_1 is selected in order to facilitate spacecraft design with the solar panel on one side and the antenna on the other. The two types of free transfer (no insertion) libration orbits around L_1 are distinguished by the sequence with which they arrive at the southernmost point, when the daily coverage from a ground-station at northern geo-centric latitudes is worst. For type-1 orbits this is the case 102 days, and for type-2 orbits 205 days after the escape manoeuvre.

The relatively large libration orbits shown in figure 2 can be reached without insertion manoeuvre and minimise the variation of the Sun-Earth-spacecraft angle, which allows to install a fixed horn antenna with a 22° beam width (3 dB) and thus reasonable gain. The antenna will be installed such that it points with a cant angle of 20° to 30° with respect to the main spacecraft axis, so that the Earth will always be in the field of view of the antenna if the spacecraft is rotated around its main axis (which is aligned with the Sun-Earth line) by 2° per day.

The downside of these orbits is the large out-of-plane amplitude, which decreases the daily visibility from a ground-station on the northern hemisphere of the Earth. As the 15 m antenna in Villafranca ($40^\circ 26' N$) will be used as the prime station in the operational phase, type-1 orbits must be selected for launches around the solstices and type-2 orbits for launches around the equinoxes. Even when combining type-1 and type-2 orbits, the launch window does not cover a full year, as illustrated by figure 3.

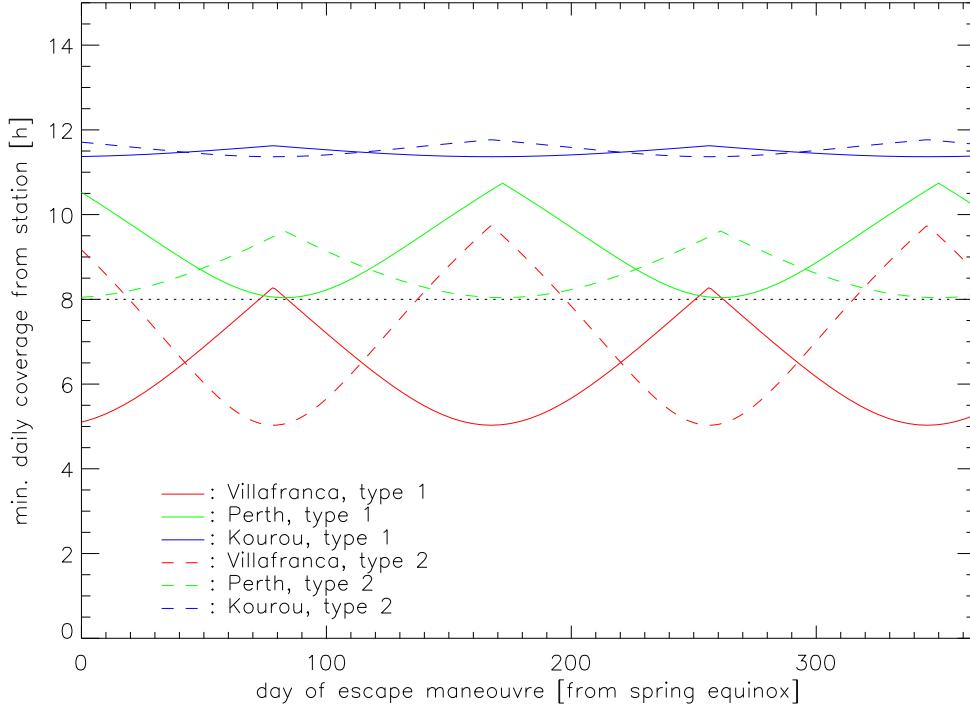


Figure 3. Daily visibility of a spacecraft on type-1 and type-2 libration orbits as shown in figure 2 from the ESA ground stations in Villafranca, Perth, and Kourou as a function of the date of the escape manoeuvre.

3. Launch and Transfer from Low Earth Orbit

As LISA Pathfinder will be launched by a small launcher into a low-Earth orbit (LEO), the total Δv to reach the parabolic transfer is substantial ($> 3 \text{ km s}^{-1}$). With a small chemical propulsion module (thrust 400N), the escape manoeuvre must be split in order to avoid an excessive burn duration and thus gravity loss.

For the initial phase of the transfer the visibility by ground-stations is critical, as shown in figures 5 and 6. Only short passages over the stations occur. The sequence illustrated in figure 4 is optimised so that each burn targets for an apogee pass over a ground station in Villafranca, Kourou, or Perth. During the pass ranging and Doppler measurements are taken by analysing the received signal repeated by the on-board transponder. The accuracy of a single measurement is 3 mm s^{-1} in Doppler and less than 1 km in ranging. This first pass is to be followed by a second one, where more orbit determination measurements are performed. The second pass is needed in order to achieve the required precision of orbit information before the size of the next manoeuvre is calculated. The total time allocated for the data processing, orbit calculation, planning of the next manoeuvre, and preparation of the commands is 8 hours. After this period, the next pass over one of the ground stations is used to uplink the commands for manoeuvre execution during the next perigee. This sequence

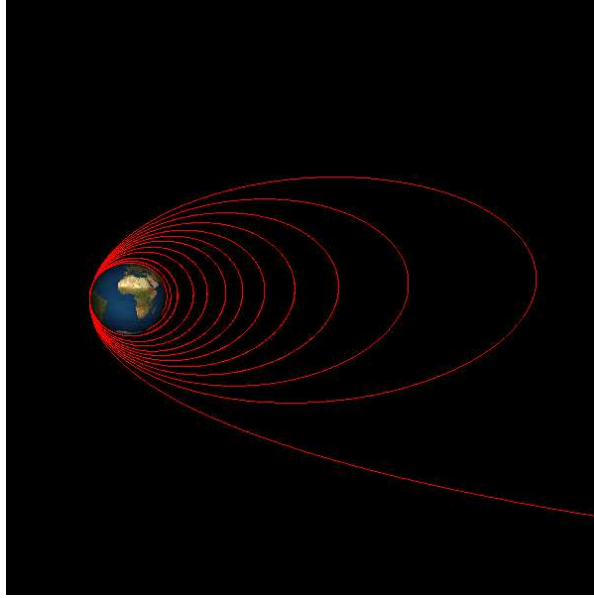


Figure 4. Sequence of orbits after release into a 900×200 km LEO by the Launcher. The propulsion module raises the apogee in 10 steps to 66,000 km, before the eleventh burn puts the spacecraft on an escape trajectory towards L_1 .

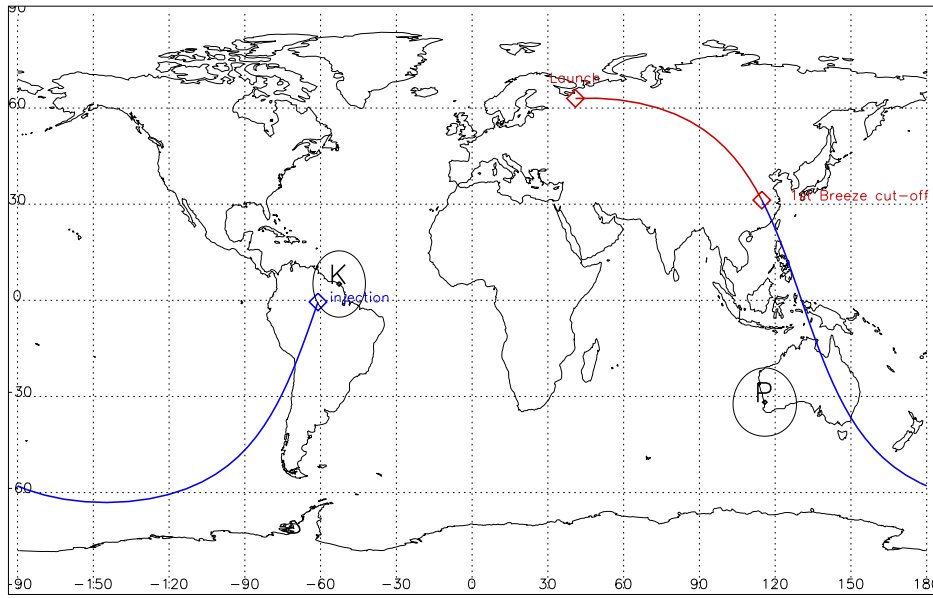


Figure 5. Ground-track of the first orbit of the LISA Pathfinder mission. The coverage circles show the area where the spacecraft is visible to the ground-station in Kourou (K) and Perth (P). Assuming a launch in northern Russia, the powered phase of the launch (shown in red) ends over China. Then, the spacecraft follows a track that leads it to the injection into the 900×200 km orbit, which is achieved by the launcher upper stage (left).

is repeated for all apogee-raise manoeuvres during the early transfer phase.

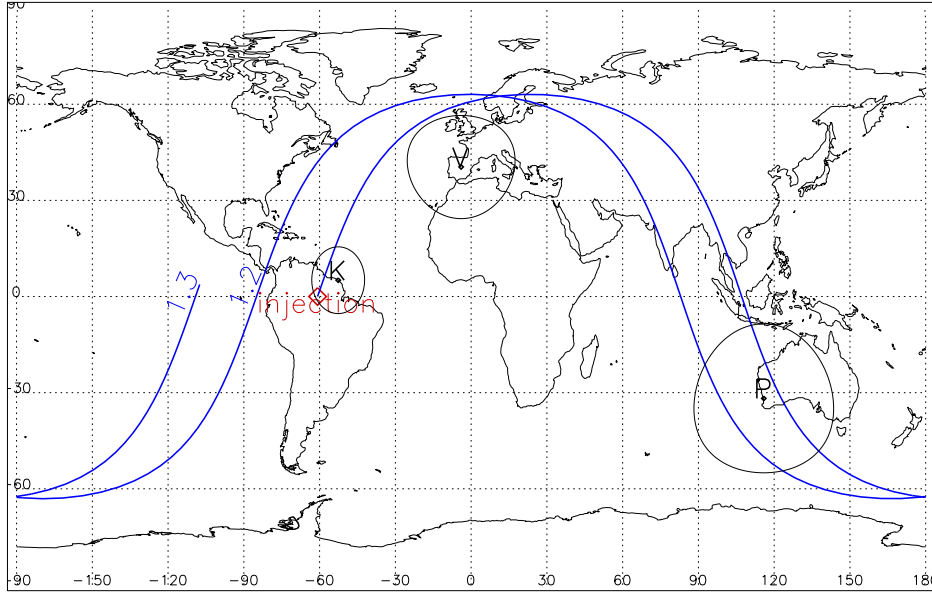


Figure 6. Ground-track of the second and third orbits of the LISA Pathfinder mission. The coverage circles show the area where the spacecraft is visible to the ground-station in Villafranca (V), Kourou (K) and Perth (P). First acquisition of the spacecraft after injection by a ground-station will be in Perth.

4. Summary and Discussion

The challenging mission design for LISA Pathfinder is in an advanced state, where optimised reference trajectories are established, and transfer strategies are defined. The environmental requirements set by the technology demonstration payloads can all be met by placing the spacecraft in a large amplitude Lissajous orbit around the first co-linear Lagrange point of the Sun-Earth system. There, the solar illumination is constant in magnitude as well as direction, minimising the variability of spurious accelerations and the thermal equilibrium.

The transfer sequence puts the spacecraft from an initially low orbit onto the escape parabola, which leads to a free transfer towards the large amplitude Lissajous orbit, without violating visibility constraints from the ESA ground-stations. In theory, the propellant allocation for the transfer could be reduced by using a lunar swing-by technique. The saving in Δv is however only 50 m s^{-1} , which is negligible compared to the total Δv budget and thus does not justify the increase in operational risk and complexity.

The current mission design presented above demonstrates how low-cost missions can be implemented using advanced astrodynamic methods in order to fulfill demanding science requirements under strong constraints in the total payload mass and launcher performance. With the LISA Pathfinder mission implemented in this way, the first step towards detecting gravitational waves in the mHz regime will be taken.

References

Danzmann K 2003 *Adv. Space Res.* **32** 1233

Farquhar R W 1973 *Celest. Mech.* **7** 458

Gómez, Jorba À, Masdemont J, and Simó C 2001 *Dynamics and Mission Design Near Libration Points*

Hechler F and Folkner W M 2003 *Adv. Space Res.* **32** 1277

Irion R 2002 *Science* **297** 1113